
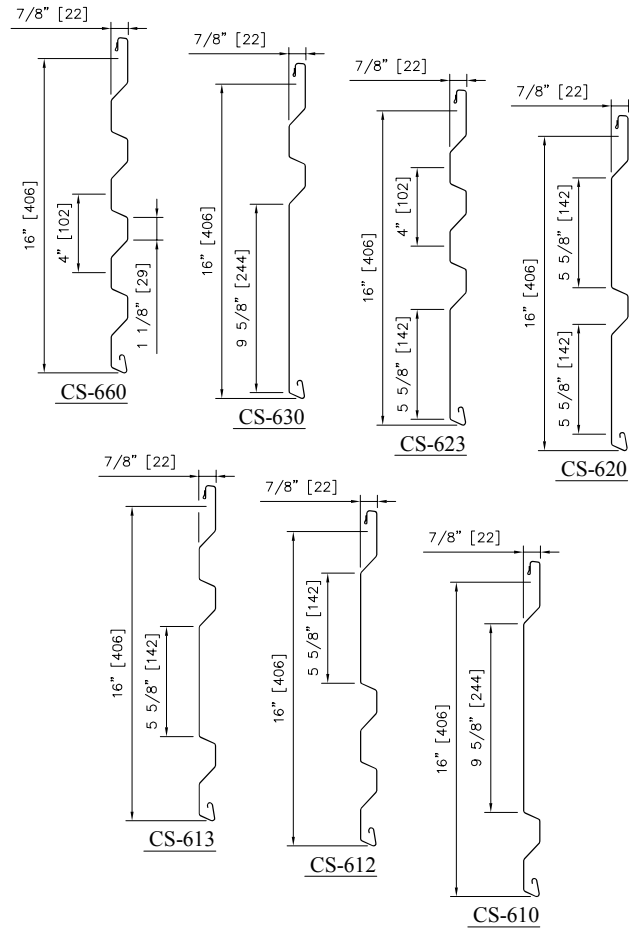


Description

16" [406mm] wide coverage, 7/8" [22mm] deep profiled panels featuring two, three or four asymmetrical ribs. These profiles have a unique interlocking side joint that incorporates a 16 gage [1.52mm] clip that provides concealed fastening and allows for thermal movement in non-overlapping conditions. This joint also functions to minimize moisture intrusion.

All Concept Series wall panels can be installed in a variety of horizontal or vertical rainscreen applications to form a complete wall system. Systems may vary from an uninsulated screen wall to a system utilizing MetaWrap®, an insulated composite backup panel system that provides Advanced Thermal and Moisture Protection (ATMP®). Contact your local CENTRIA sales person for more information regarding the performance of CENTRIA's rainscreens. This wall panel system has three attachment clip options. Contact CENTRIA for more information.

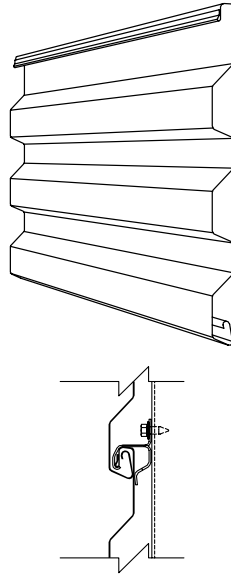

Notes

- For information on special applications, contact your local CENTRIA Representative.
- All Concept Series panels may be used on walls and soffits but not roofs.
- Panel length tolerance is + or - 1/4" [6mm].
- For protective coatings - see CENTRIA Color Chart or visit www.CENTRIA.com.
- Oil canning within mill tolerances will not be cause for rejection.

General Design Options

	GALVANIZED¹ (G90)	STAINLESS STEEL¹ (304)	ALUMINUM¹ (3003-H14)	ZINC¹ (PRE-WEATHERED)
PANEL DEPTH	7/8" [22mm]	7/8" [22mm]	7/8" [22mm]	7/8" [22mm]
PANEL COVERAGE	16" [406mm]	16" [406mm]	16" [406mm]	16" [406mm]
SIDE LAP	Interlocking	Interlocking	Interlocking	Interlocking
END LAPS	(See standard detail) Shop or field notch 2" [51mm] for 22 [.76mm] and 24 [.60mm] gages only. Flash or extrusion for all gages	(See standard detail) Shop or field notch 2" [51mm] for 22 [.76mm] and 24 [.60mm] gages only. Flash for all gages	(See standard detail) Shop or field notch 2" [51mm] for .032" [.81mm] Flash or extrusion for all thicknesses	(See standard detail) Flashing
GAGES (STANDARD)	20 [.91mm], 22 [.76mm]	20 [.91mm], 22 [.76mm]	.040" [1.02mm], .050" [1.27mm]	1mm [.039"]
GAGES (OPTIONAL)	18 [1.19mm], 24 [.60mm] CS-660 only	24 [.60mm] CS-660 only	.032" [.81mm] CS-660 only	Contact CENTRIA
STANDARD LENGTH	5 [1.52m] - 30 ft. [9.14m]	5 [1.52m] - 30 ft. [9.14m]	5 [1.52m] - 20 ft. [6.10m]	5 [1.52m] - 10 ft. [3.05m] ³
TEXTURE (STANDARD)	Smooth	Smooth	Smooth	Smooth - Directional
TEXTURE (OPTIONAL)	Embossed ² (20 [.91mm] - 24 [.60mm] gage only)	Embossed ²	Embossed ² (.032" [.81mm] only)	N/A
FINISHES	See CENTRIA Color Chart	#4 Brushed	See CENTRIA Color Chart	See Jarden Color Chart

1. Alternate base material, panel lengths and gages may also be available. Contact CENTRIA.
 2. Embossing is non-directional.
 3. Maximum Zinc Panel lengths are 10' [3.048m] for vertical and 20' [6.0m] for horizontal panels.
 * Patent No.: US D538,948; D527,834