


CENTRIA's Formavue FV-600KD integrated window system is designed to provide a high-performance, thermally efficient window to panel interface with 3"-T thick Formawall Dimension Series insulated metal panels. This window system integrates into the panel joinery with thermally broken extrusions at the window head and sill. The large thermal breaks are aligned with the glass and panel insulation, as well as additional insulation in the window head for one of the most efficient integrated systems on the market today. FV-600KD windows integrate with horizontal and vertical panels and are available with spandrel or thru-tube supports, for punched or strip window applications. The FV-600KD Field Assembled Window Frame allows for larger window heights than the FV-600 Shop Assembled Window Frame. Exterior glazed mullions are interchangeable in the FV-600KD frame and include full mullion (with pressure bar and snap covers) and structural silicone glazed (SSG) mullions.

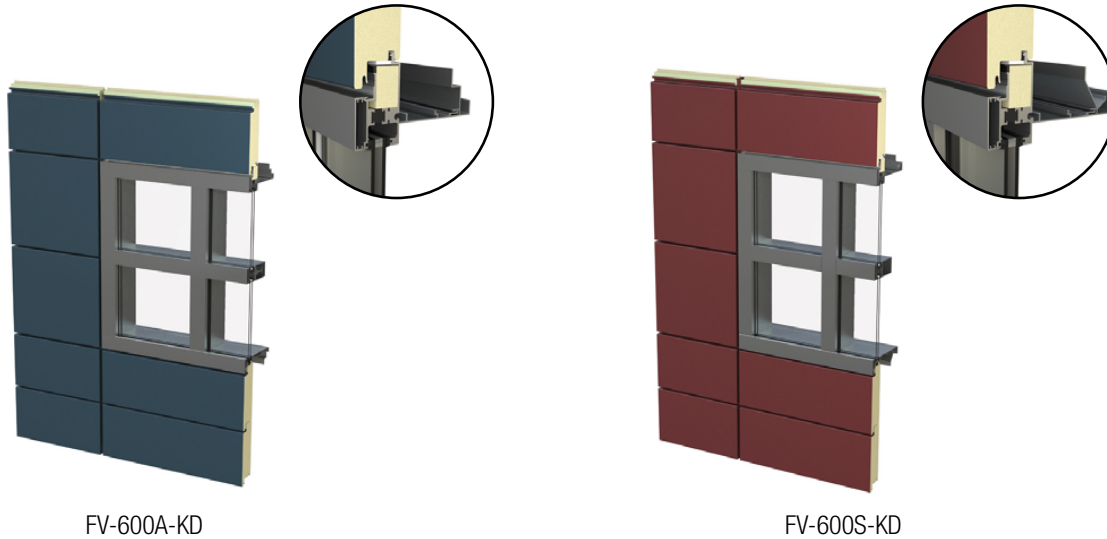

## GENERAL DESIGN OPTIONS

	FV-600A-KD	FV-600A-KDV	FV-600S-KD	FV-600S-KDV
<b>BUILDING STRUCTURE</b>	Steel Studs	Steel Studs	Steel Thru-Tubes <i>Standard - 4", 5", 6" and 8" x 2" tubes</i>	Steel Thru-Tubes <i>Standard - 4", 5", 6" and 8" x 2" tubes</i>
<b>PANEL THICKNESS</b>	3"-T	3"-T	3"-T	3"-T
<b>PANEL ORIENTATION</b>	Horizontal	Vertical	Horizontal	Vertical
<b>FRAME DEPTH</b>	3" + Aluminum Tube Depth <i>Standard - 4", 5", 6" x 3" tubes</i>	3" + Aluminum Tube Depth <i>Standard - 4", 5", 6" x 3" tubes</i>	3" + Steel Tube Depth	3" + Steel Tube Depth
<b>SITE LINE</b>	3"	3"	3"	3"
<b>NOMINAL FRAME WALL THICKNESS</b>	1/8"	1/8"	1/8"	1/8"
<b>FRAME FABRICATION</b>	Field-Assembled	Field-Assembled	Field-Assembled	Field-Assembled
<b>GLAZING* (1" nominal)</b>	Exterior Glazed	Exterior Glazed	Exterior Glazed	Exterior Glazed
<b>MAX. WINDOW HEIGHT</b>	Limited by load capacity	Limited by load capacity	Limited by load capacity	Limited by load capacity
<b>MAX. EXTRUSION LENGTH</b>	Standard: 16' <i>Max: up to 24'-6"</i>	Standard: 16' <i>Max: up to 24'-6"</i>	Standard: 16' <i>Max: up to 24'-6"</i>	Standard: 16' <i>Max: up to 24'-6"</i>
<b>INTERIOR TRIM</b>	Extruded & Painted <i>Field Applied; Drywall Adaptor Available</i>	Extruded & Painted <i>Field Applied; Drywall Adaptor Available</i>	Extruded & Painted <i>Field Applied; Drywall Adaptor Available</i>	Extruded & Painted <i>Field Applied; Drywall Adaptor Available</i>
<b>WINDOW DESIGNS</b>	Punched or Strip Windows (above 9'4") <i>Optional: Horizontal Stacks</i>	Punched or Strip Windows (above 9'4") <i>Optional: Horizontal Stacks</i>	Punched or Strip Windows (above 9'4") <i>Optional: Horizontal Stacks</i>	Punched or Strip Windows (above 9'4") <i>Optional: Horizontal Stacks</i>
<b>CORNERS</b>	Outside: Exterior Glazed Inside: Exterior Glazed	Outside: Exterior Glazed Inside: Exterior Glazed	Outside: Exterior Glazed Inside: Exterior Glazed	Outside: Exterior Glazed Inside: Exterior Glazed

\*Silicone required for SSG mullion